









NPD-Switched PDU series

NPD-MR2/NPD-MC2:
Switched 15ALoad PDU, 2 x NEMA5-15R-Outlets
NPD-MR8/NPD8C16A:
Switched 1U 19" PDU, 15A Load, 8 x NEMA 5-15/20R Outlets
NPD-MV16/NPDV20C16A:
Switched 0U Vertical PDU, 20A load, 16 x NEMA15/20R Outlets

More information:
WWW.NIVEOPROFESSIONAL.COM

All rights reserved Niveo International BV 2020

Features:

System Function:

- Built-in embedded system:
  Support 10M Ethernet interface, provides webpage and SNMP remote management.
- Multiple protocols:
  Support ICMP, ARP, IP, TCP, UDP, DHCP, HTTP, NTP, SNMP v1.
- Local display information:
  Seven-segments can display current, web site and temperature and humidity values.

Power Management:



Remote Monitor

Remote monitoring PDU status by web and SNMP



Remote Control

Remote per outlet on/off by web and SNMP.



Current Measurement

Measure PDU total current consumption.



Mail Notification

Notify specified user by mail and SNMP when outlet action or current over threshold.



Threshold Sensing

User-definable warning and overload threshold value as the basis for alarm.



Event Alert

When current exceeds the preset threshold, PDU will beep and LED will flash.



Power Sequence

User-definable power on/off sequence time.



Overload Protection

When overload, circuit breaker will automatically trip to protect the safety of electricity.



Central Management

Free centralized monitoring software, real-time monitoring of a large number of PDU, provide data records and history chart.

All rights reserved Niveo International BV 2020

Model List

Model Number	Output	Input	Voltage	Capacity
NPD-MC2	(2) IEC 320 C13	Inlet IEC320 C20 Power cord, C19 to C20, 3m	230V	16 Amp
NPD8C16A	(8) IEC 320 C13	Inlet IEC320 C20 Power cord, C19 to C20, 3m	230V	16 Amp
NPDV20C16A	(14) IEC 320 C13 (2) IEC 320 C19	Inlet IEC320 C20 Power cord, C19 to C20, 3m	230V	16 Amp
NPD-MR2	(2) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-15P, 3m	115V	15 Amp
NPD-MR8	(8) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-15P, 3m	115V	15 Amp
NPD-MV16	(16) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-20P, 3m	115V	20 Amp
NPD-MV24	(24) NEMA 5-15/20R	Inlet IEC320 C20 Power cord, C19 to NEMA 5-20P, 3m	115V	20 Amp

All rights reserved Niveo International BV 2020

Model Number:

NPD-MC2/NPD-MR2


Front view



Specification

Output	NPD-MC2	NPD-MR2
Voltage 200~240 VAC	100~127 VAC	
Max. Current	16 A	15 A
Outlet IEC320 C13	IEC320 C19	
Input		
Voltage 200~240 VAC	100~127 VAC	
Frequency 50/60Hz,	full range	
Conncection	IEC320 C20	
Max. Capacity	3680 VA	
Overload Protection	Circuit breaker (UL1077)	
Measurement		
Current +/-2%+/-0.1A	@0.2A ~ 20 A	
Dimension/Weight		
Size	254 x 90 x 40 mm	
Weight	1.7 kg	1.0 kg
Package Size	505 x 140 x 90 mm	
Package Weight	1.9 kg	
Operation		
Operation Temp.	0 ~40 ℃	
Operation Humid.	0% ~90% RH	
Storage Temp.	-20 ℃ ~65 ℃	
Storage Humid.	0% ~90% RH	
Approval		
Certification	CE, FCC, UL	
Warranty	3 years	
Other		
ENV Connection	None	

Line Drawing

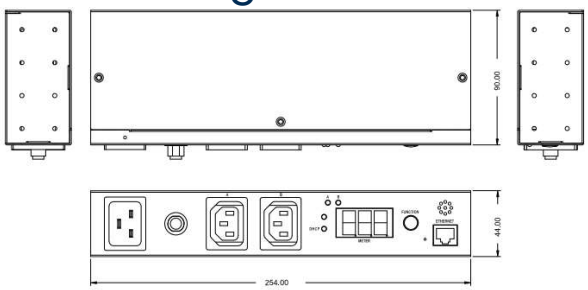

All rights reserved Niveo International BV 2020

Model Number:

NPD8C16A/NPD-MR8

Front view




Back view



Specification

Output	NPD8C16A	NPD-MR8
Voltage 200~240 VAC	100~127 VAC	
Max. Current	16 A	15 A
Outlet IEC320 C13	IEC320 C19	
Input		
Voltage 200~240 VAC	100~127 VAC	
Frequency 50/60Hz,	full range	
Conncection	IEC320 C20	
Max. Capacity	3680 VA	
Overload Protection Circuit breaker (UL1077)		
Measurement		
Current +/-2%+/-0.1A @0.2A ~ 20 A		
Dimension/Weight		
Size	432 x 90 x 44 mm	
Weight	2.2 kg	2.0 kg
Package Size 505 x 210 x 90 mm		
Package Weight	2.5 kg	
Operation		
Operation Temp.	0 ~40 °C	
Operation Humid. 0%	~90% RH	
Storage Temp.	-20 °C ~65 °C	
Storage Humid. 0%	~90% RH	
Approval		
Certification	CE, FCC, UL	
Warranty	3 years	
Other		
ENV Connection	None	

Line Drawing

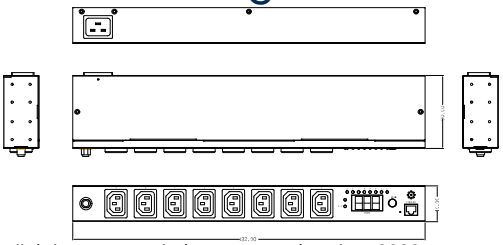

All rights reserved Niveo International BV 2020

Model Number:

NPDV20C16A/NPD-MV16


Front view



Specification

Output	NPDV20C16A	NPD-MV16
Voltage 200~240 VAC	100~127 VAC	
Max. Current	16 A	20 A
Outlet IEC320 C13	IEC320 C19	
Input		
Voltage 200~240 VAC	100~127 VAC	
Frequency 50/60Hz,	full range	
Conncection	IEC320 C20	
Max. Capacity	3680 VA	
Overload Protection	Circuit breaker (UL1077)	
Measurement		
Current +/-2%+/-0.1A	@0.2A ~ 20 A	
Dimension/Weight		
Size	1245 x 56 x 44 mm	
Weight	3.7 kg	4.0 kg
Package Size	1360 x 220 x 110 mm	
Package Weight	4.7 kg	
Operation		
Operation Temp.	0 ~40 °C	
Operation Humid.	0% ~90% RH	
Storage Temp.	-20 °C ~65 °C	
Storage Humid.	0% ~90% RH	
Approval		
Certification	CE, FCC, UL	
Warranty	3 years	
Other		
ENV Connection	None	

Line Drawing

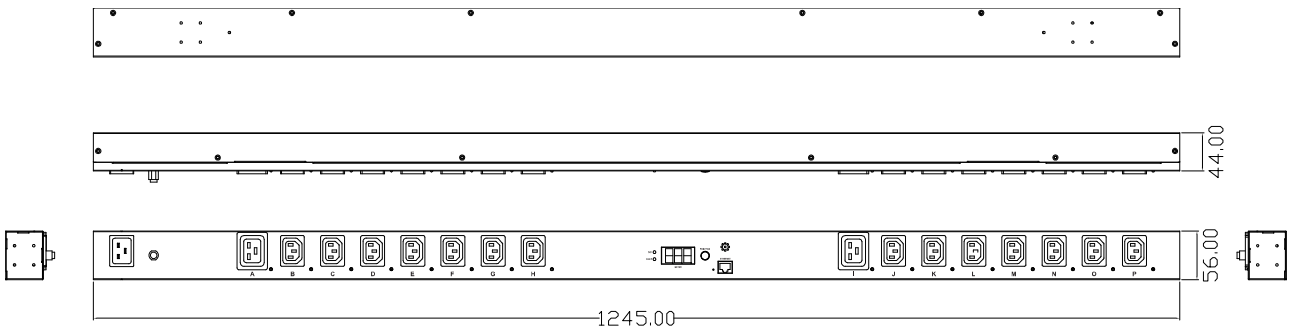

All rights reserved Niveo International BV 2020